

The Wizard Pro is a lightweight, compact auto-braking descender for rope access and rescue.

It features a button that allows the cam to be held open for easier insertion of the rope and to remain connected to the user while it is open or while the rope is being inserted or removed.

Designed for expert users; the lever does not have the anti-panic function. The lever automatically returns to the LOCK position when released.

The Wizard Pro delivers extraordinary controllability with its proven internal mechanism and the rigid lever that is made of robust hot-forged aluminum alloy.

The locking cam uses an innovative design for smooth action on the rope which prevents rapid wear-and-tear and absorbs energy from small shocks with a slight amount of rope slippage. The cam can be deactivated with a trigger to allow quick sliding of the rope in situations with no load or limited load.


Equipped with NFC TRACK tag for digital identification.

Standards:


- **EN 12841/C** as a descender for semi-static ropes from 10.5 to 11 mm and for workers up to 150 kg; can also be used for rope access rescue up to 200 kg.

- **EN 341/2A** as an emergency evacuation device on a single line for workers up to 120 kg, 11 mm semi-static rope (Iridium 11 mm).

- **EN 15151-1** for climbing structures using mountaineering techniques with dynamic ropes ranging from 8.9 to 11 mm.

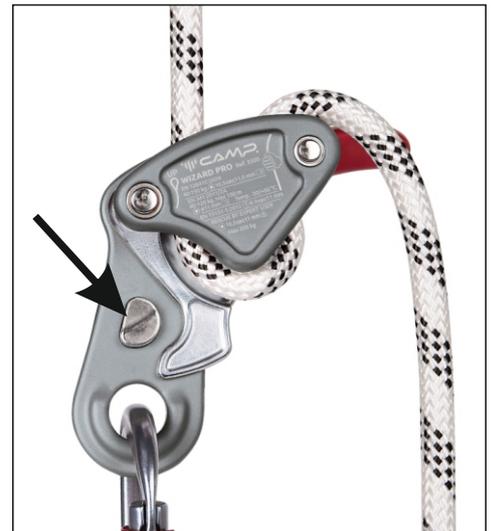

WIZARD PRO BLACK
350003

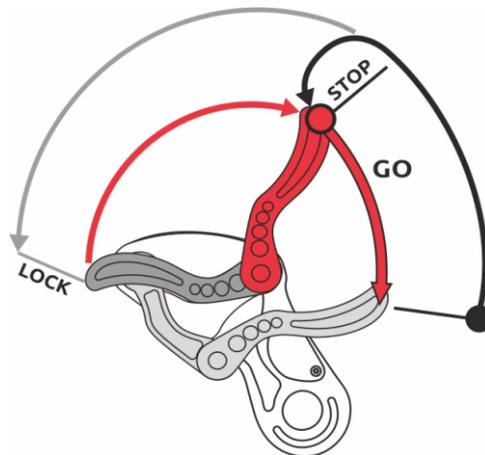

| Ref. | Product name Nombre del producto | Weight Peso | | Breaking load Carga de rotura | Rope diameter Diámetro de cuerda | | CE | | STANDARD | Rescue use Uso en rescate | ERC |
|--------|-------------------------------------|----------------|------|----------------------------------|-------------------------------------|----------|------------|------------|----------|------------------------------|-----|
| | | g | oz | | Min - mm | Max - mm | EN 12841/C | EN 15151-1 | | | |
| 3500 | WIZARD PRO | 315 | 11.1 | 12 | 8.9 | 11 | • | • | • | Max 200 kg | • |
| 350003 | WIZARD PRO BLACK | | | | | | | | | | |

WIZARD PRO

DESCENDER

Ref. 3500

ROPE ACCESS, TEAM RESCUE, SELF RESCUE, TREE CLIMBING


Robust hot-forged aluminum alloy


Button: allows to insert or remove the rope without removing the connector

Equipped with NFC TRACK tag for digital identification

Trigger to allow quick sliding of the rope in situations with no load or limited load

The lever automatically returns to the LOCK position when released

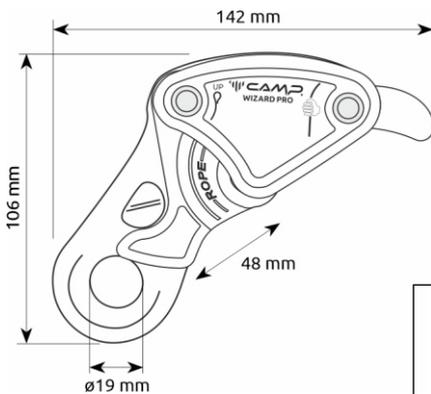

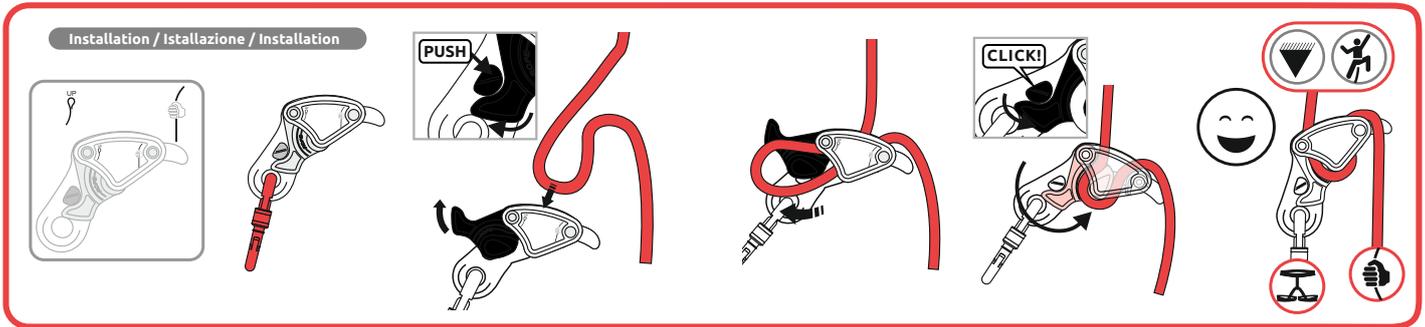

Rope compatibility
Compatibilità della corda
Compatibilité de la corde

EN 12841/C




- EN 1891 Type A
10,5 ≤ Ø ≤ 11,0 mm

EN 341/2A

- EN 1891 Type A
C.A.M.P. Iridium Ø 11 mm
ref.2811/2811A

EN 15151-1

- ① EN 892 Single
8,9 ≤ Ø ≤ 11 mm

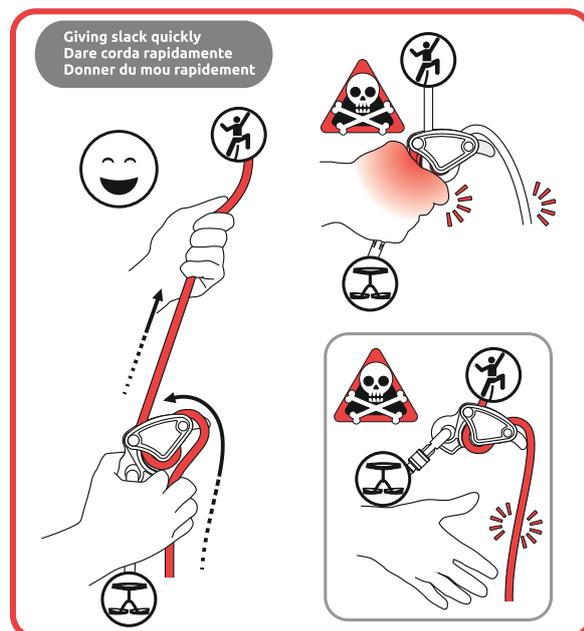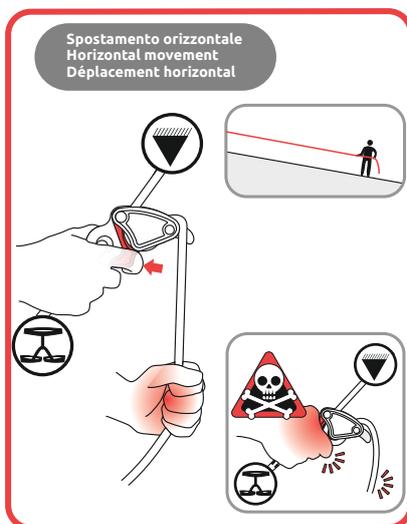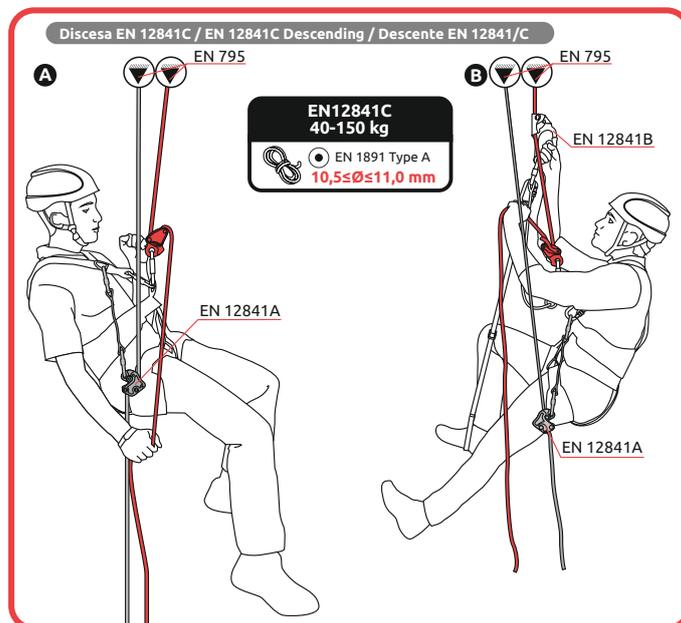

WIZARD PRO

DESCENDER

Ref. 3500

ROPE ACCESS, TEAM RESCUE, SELF RESCUE, TREE CLIMBING

Discesa EN 341/2A
EN 341/2A Lowering
Descente EN 341/2A

A

EN 795

B

EN 795

EN341/2A

- EN 1891 Type A
- C.A.M.P. Iridium Ø 11 mm
- ref.2811/2811A

Soccorso con carichi elevati, solo per utilizzatori esperti
Rescue use with heavy loads, experts only
Secours avec charge élevée, seulement pour experts

A

EN 795

EN 12841A
200 kg MAX

B

EN 795

EN 12841A
200 kg MAX

200 kg MAX

**RESCUE USE
MAX 200 kg**

- EN 1891 Type A
- 10,5 ≤ Ø ≤ 11,0 mm

(EU) 2016/425

SOLO UTILIZZATORI ESPERTI / EXPERT USERS ONLY
SEULMENT UTILISATEURS EXPERT / NUR FÜR FORTGESCHRITTENE BENUTZER
SOLO PARA USUARIOS EXPERIMENTADOS / ALLEEN VOOR ERVAREN GEBRUIKERS